

Ka LNB 17.30-22.30 GHz 3-8 Band

Key features




- Auto Switch between External or Internal reference
- High P1dB and IP3
- Excellent Phase noise meets all profiles of DVB-S2X.
- 3-8 bands, switching via V/T or optional M&C
- Wide operating temperature range
- Alarm and Monitoring & Control as option



Description


The Ka-Band Multiband LNB is the choice when you need to switch between 3 to 8 sub-bands within the frequency range of 17.30 to 22.30 GHz including Low loss isolator. SMW also offers Single- and 2-band models, Ka Transmit band monitoring LNBs/BDCs/TLTs and LNA+BDCs systems for up to full Ka-Band simultaneous reception, with the same excellent performance and useful features.

Options include the daisy-chainable SMW M&C interface (RS-485/Modbus RTU), Sum alarm output, Customizable LOs, IF range up to 2150 MHz, Enclosure with additional fixing points.

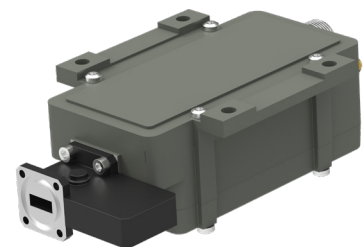

Optional enclosure fixing points


LNB connector (standard)



Connector A (standard)

Type: N female, (option F female or SMA female)
Functions: L-Band out, DC in, External 10 MHz in

LNB connectors (optional)



Connector B (optional)

Type: M8 female, 4 pin, A-coded
Functions: Alarm and M&C

Connector B (optional)



1 = Alarm open collector (max. 200 mA)
or optionally DC input.
2 = A pos+ RS485
3 = B neg- RS485
4 = Common (GND)
5 = Shield

Connector C (optional)

Type: SMA female only
Functions: Ext. 10 MHz in and/or DC input



Explore our full
product range
in this category



Ka LNB 17.30-22.30 GHz 3-8 Band

Technical specifications

Parameter		
MODELS	LO frequencies	Custom between 16.25 to 20.75 GHz
	Models	Multiband 3 to 8 sub-bands, max 8 Bands (legacy mode)
	Switching	Band Switching Legacy 13/15/18/24 V and 22 kHz tone or via RS485 Modbus RTU (option Monitoring & Control)
INPUT	Input frequency	3 to 8 sub-bands, custom between 17.20 to 22.30 GHz, overlap possible
	Input	Flange PBR220, waveguide WR42
	DC Input	+11 to +26 V through output connector or separate SMA connector (optional)
	Input max power	0 dBm instantaneous (not continuous)
	Input VSWR	1.35:1 max. with Low Loss Isolator (included)
INTERNAL	LO ref.	Auto LO ref. External 10 MHz ref / Internal ± 2.5 ppm -40 to +80°C
	External LO ref.	Sine wave, Level -10 to +10 dBm. Supplied through output connector.
	LO Leakage	-60 dBm max. @ waveguide input, -40 dBm max. @ IF output
	Gain	60 dB typ. (55dB min.)
	Gain variation over 24h	± 0.1 dB @ 23°C
	Flatness	± 0.4 dB within 30 MHz, ± 2 dB max. each band
	Noise figure	1.3 dB to 1.7 dB typ., increases with input frequency
	Phase Noise	-35 dBc @ 10 Hz -65 dBc @ 100 Hz -80 dBc @ 1 kHz -85 dBc @ 10 kHz -95 dBc @ 100 kHz -112 dBc @ >1 MHz typ.
	Spuriouses in band	W/o signal -75 dBm max. With -10 dBm output signal -65 dBc max.
	Group delay	± 1 ns max.
	Out of band rejection	20 dB min.
	Image Rejection	45 dB @ LO 16.25, 20 dB @ LO 20.25
	IF output	950-1950 MHz or 1000-2000 MHz, (950-2250 MHz optional)
OUTPUT	Output P1dB	+15 dBm min.
	Output IP3	+25 dBm min.
	Output VSWR	1.7:1 typ.
	Output Connector	N-type 50 Ω , SMA-type 50 Ω or F-type 75 Ω
GENERAL	Alarm functions (option)	Sum alarm, set via M&C to alarm in any combination of: LNA failure, Total current, LO lock (Ext/Int/n/a), signal power high/low, Supply voltage low. Open collector 3.3 to 28 V, max. 200 mA (pull-up 10 k Ohm at host side), pin 1 in M8 connector.
	M & C functions (option)	Via MODBUS RTU RS485 electrical interface, see document Monitoring and Control technical interface for details. NOTE! Mates with M8 male connector/Cable, use only shielded CAT 5 cables
	Dimensions	153 x 68 x 45 mm, including isolator
	Weight	375 g (SMA-connector) including isolator
	MTBF	MTBF as per MIL-HDBK-217F Notice 2: Environmental Condition GF (Ground Fixed): >690000 hours, Environmental Condition AIC (Airborne, Inhabited, Cargo): >360000 hour, Quality level: Commercial, Temperature used for MTBF calculation: +35°C Ambient
	Temperature range	Storage and operating: -40 to +80°C, -40 to +176°F
OPTIONS	Miscellaneous	Enclosed conductive O-ring, mounting screws (M3 x 8) 4 pcs
		- Separate SMA connector for DC input or Ext. 10 MHz reference - Alarm and Monitoring & Control - Customized gain - Custom LOs - Pressurizable 0.1 bar max. - Input frequency from 17.20 GHz

Ka LNB 17.30-22.30 GHz 3-8 Band

Model examples

*)

3-BAND					
Band	Input freq. (GHz)	LO	L-band (MHz)	Voltage/Tone Switching	SMW M&C switch PDU #
1	17.70-18.70	16.75	950-1950	13 V (11.5 to 14.9 V)	1
2	18.45-19.45	17.50	950-1950	13 V + 22 kHz tone	2
3	19.20-20.20	18.25	950-1950	18 V (15.2 to 26.0 V)	3
1	17.70-18.70	16.75	950-1950	13 V (11.5 to 14.9 V)	1
2	18.70-19.70	17.75	950-1950	13 V + 22 kHz tone	2
3	19.70-20.70	18.75	950-1950	18 V (15.2 to 26.0 V)	3
1	17.30-18.30	16.35	950-1950	13 V (11.5 to 14.9 V)	1
2	18.30-19.30	17.35	950-1950	13 V + 22 kHz tone	2
3	19.30-20.30	18.35	950-1950	18 V (15.2 to 26.0 V)	3
1	18.20-19.20	17.25	950-1950	13 V (11.5 to 14.9 V)	1
2	19.20-20.20	18.25	950-1950	13 V + 22 kHz tone	2
3	20.20-21.20	19.25	950-1950	18 V (15.2 to 26.0 V)	3
1	19.20-20.20	18.25	950-1950	13 V (11.5 to 14.9 V)	1
2	20.20-21.20	19.25	950-1950	13 V + 22 kHz tone	2
3	21.20-22.20	20.25	950-1950	18 V (15.2 to 26.0 V)	3
1	17.50-18.50	16.55	950-1950	13 V (11.5 to 14.9 V)	1
2	18.20-19.20	17.25	950-1950	13 V + 22 kHz tone	2
3	19.20-20.20	18.25	950-1950	18 V (15.2 to 26.0 V)	3
1-3	Customized	Cust.	950-1950	Customized	1-3

*) SES O3b mPOWER models
KA-AOPXXXXX-152A-33-SE and
KA-AFBXXXXX-152A-XX-01, ask for separate product sheets.

4-BAND					
Band	Input freq. (GHz)	LO	L-band (MHz)	Voltage/Tone Switching	SMW M&C switch PDU #
1	17.20-18.20	16.25	950-1950	13 V (11.5 to 14.9 V)	1
2	18.20-19.20	17.25	950-1950	13 V + 22 kHz tone	2
3	19.20-20.20	18.25	950-1950	18 V (15.2 to 26.0 V)	3
4	20.20-21.20	19.25	950-1950	18 V + 22 kHz tone	4
1	17.70-18.70	16.75	950-1950	13 V (11.5 to 14.9 V)	1
2	18.70-19.70	17.75	950-1950	13 V + 22 kHz tone	2
3	19.70-20.70	18.75	950-1950	18 V (15.2 to 26.0 V)	3
4	20.70-21.70	19.75	950-1950	18 V + 22 kHz tone	4
1	18.20-19.20	17.25	950-1950	13 V (11.5 to 14.9 V)	1
2	19.20-20.20	18.25	950-1950	13 V + 22 kHz tone	2
3	20.20-21.20	19.25	950-1950	18 V (15.2 to 26.0 V)	3
4	21.20-22.20	20.25	950-1950	18 V + 22 kHz tone	4
1-4	Customized	Cust.	950-1950	Customized	1-4


6-BAND					
Band	Input freq. (GHz)	LO	L-band (MHz)	Voltage/Tone Switching	SMW M&C switch PDU #
1	17.30-18.30	16.35	950-1950	13 V (11.5 to 14.9 V)	1
2	18.00-19.00	17.05	950-1950	13 V + 22 kHz tone	2
3	18.70-19.70	17.75	950-1950	18 V (15.2 to 20.0 V)	3
4	19.40-20.40	18.45	950-1950	18 V + 22 kHz tone	4
5	20.10-21.10	19.15	950-1950	24 V (20.3-26.0 V)	5
6	20.80-21.30	19.85	950-1450	24 V + 22 kHz tone	6
1-6	Customized	Cust.	950-1950	Customized	1-6

5-BAND					
Band	Input freq. (GHz)	LO	L-band (MHz)	Voltage/Tone Switching	SMW M&C switch PDU #
1	17.20-18.20	16.25	950-1950	13 V (11.5 to 14.9 V)	1
2	18.20-19.20	17.25	950-1950	13 V + 22 kHz tone	2
3	19.20-20.20	18.25	950-1950	18 V (15.2 to 20.0 V)	3
4	20.20-21.20	19.25	950-1950	18 V + 22 kHz tone	4
5	21.20-22.20	20.25	950-1950	24 V (20.3-26.0 V)	5
1	17.50-18.50	16.55	950-1950	13 V (11.5 to 13.9 V)	1
2	18.40-19.40	17.45	950-1950	13 V + 22 kHz tone	2
3	19.30-20.30	18.35	950-1950	15 V (14.2 to 16.3 V)	3
4	20.20-21.20	19.25	950-1950	15 V + 22 kHz tone	4
5	21.10-22.10	20.15	950-1950	18 V (16.6 to 26.0 V)	5
1-5	Customized	Cust.	950-1950	Customized	1-5

8-BAND					
Band	Input freq. (GHz)	LO	L-band (MHz)	Voltage/Tone Switching	SMW M&C switch PDU #
1	17.20-18.20	16.25	950-1950	13 V (11.5 to 13.9 V)	1
2	17.85-18.85	16.90	950-1950	13 V + 22 kHz tone	2
3	18.50-19.50	17.55	950-1950	15 V (14.2 to 16.3 V)	3
4	19.15-20.15	18.20	950-1950	15 V + 22 kHz tone	4
5	19.80-20.80	18.85	950-1950	18 V (16.6 to 20.0 V)	5
6	20.45-21.45	19.50	950-1950	18 V + 22 kHz tone	6
7	21.10-22.10	20.15	950-1950	24 V (20.3-26.0 V)	7
8	21.70-22.30	20.75	950-1550	24 V + 22 kHz tone	8
1-8	Customized	Cust.	950-1950	Customized	1-8

Ka LNB 17.30-22.30 GHz 3-8 Band

Technical Drawing

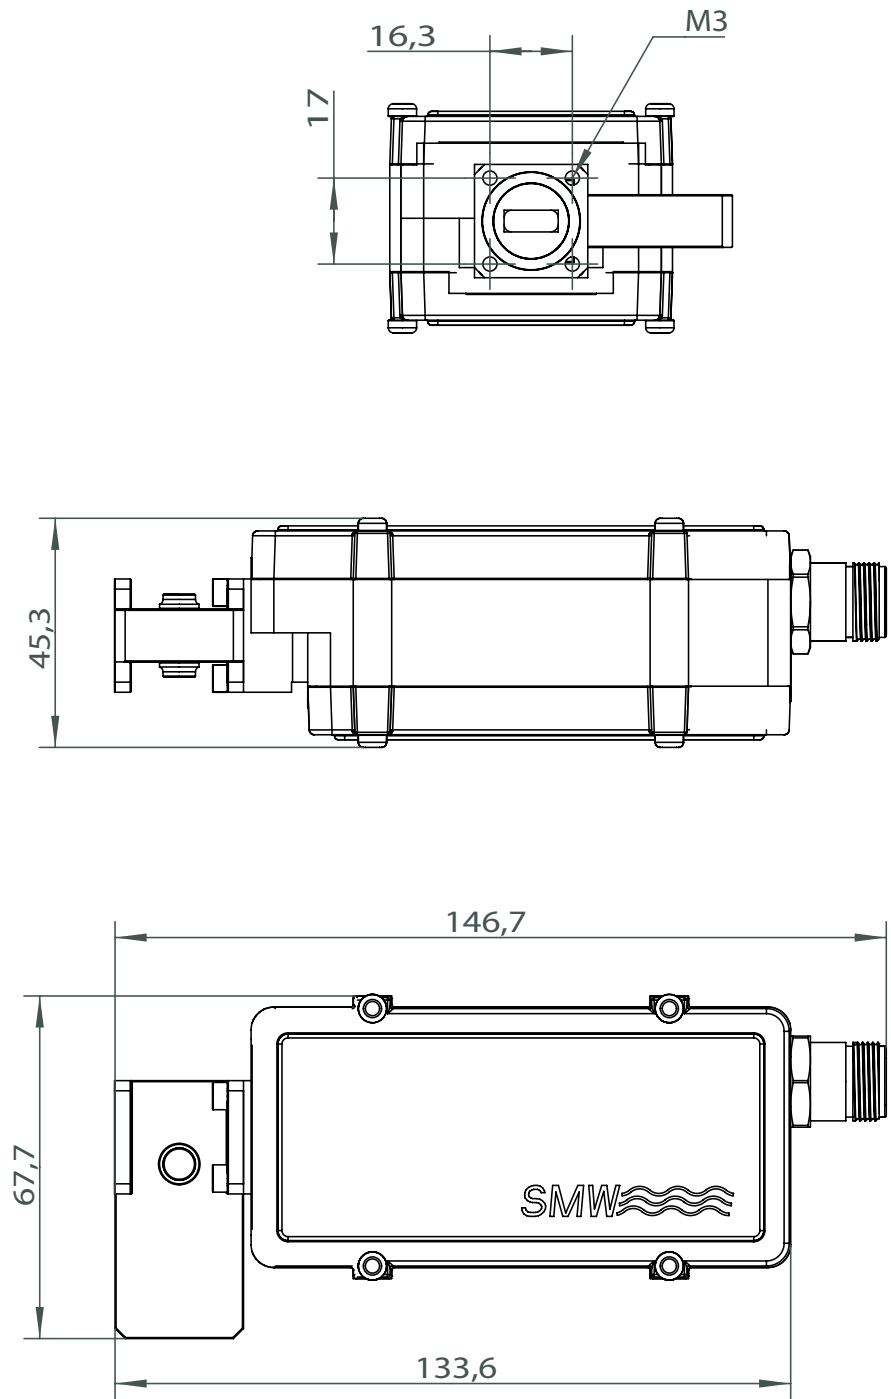

Professional Satcom Frequency Converters & Components. All products are fully CE and RoHS compliant and every unit includes full documentation of performance tests and quality control. Please contact sales@smw.se to configure or customize the unit to your needs. Visit smw.se or scan QR code to see our full product range and request a quote.



Technical specifications are typical, for specific part number specifications, please contact us. Specifications are subject to change without prior notice. Products from Swedish Microwave AB are made for commercial use.
 Swedish Microwave AB | Dynamovägen 5 | S-591 61 Motala | Sweden | Contact: +46 141 21 61 35 | sales@smw.se | smw.se